

Arinst Firmware re-installation.

At the moment of writing (06.09.2022) this guide is applicable to following Arinst devices:


- Arinst VNA-PR1
- Arinst VNA-PR1-M
- Arinst SDR Dreamkit V1D
- Arinst SDR Dreamkit V2D
- Arinst SSA R3
- Arinst ArSiG-R
- Arinst ArSiG-S

Any of these devices could be put into “Forced update” mode to re-install latest firmware. You should do this step in following cases:

- Your device has failed to install a firmware update.
- Your device is bootlooping due to a firmware issue.
- You are trying to use Windows 7/8/8.1 to install the update via Arinst VL or Arinst Firmware Updater.
- You are prompted to do so by our support staff.

Follow these steps in order to perform the re-installation of firmware:

1. Ensure your device is off.
2. Press and hold the top-right corner (in default device orientation) of the device's screen with a stylus as pictured below:

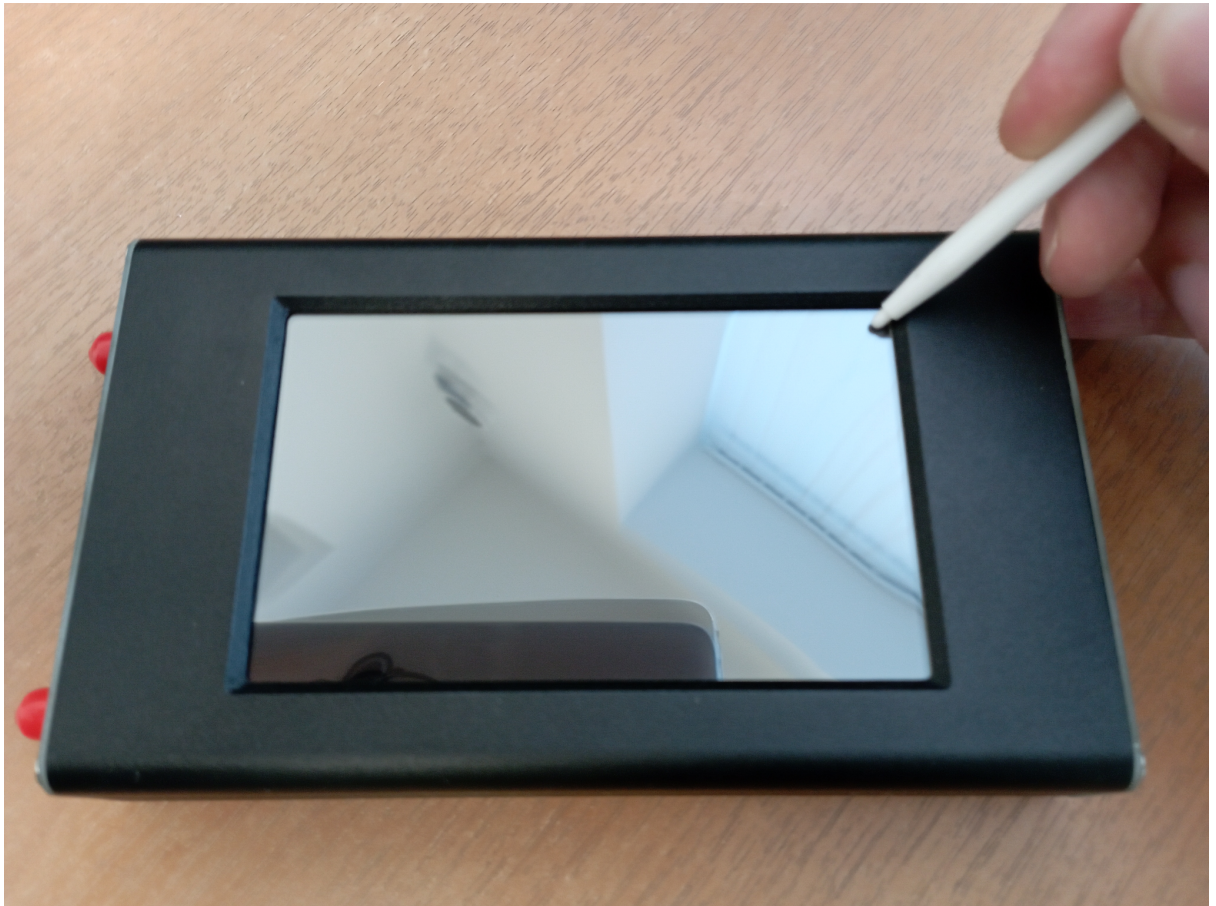

3. Without releasing the screen power on the device.

4. You should see a message as pictured below:



5. Connect the device to the PC via usb cable and proceed to install the firmware as per usual procedure. Note, that your device will report it's firmware version as 0.0.0. This is intentional and should not be considered an issue.